


Mg:SLN Prism for THz Generation

Unrivaled New Substrate Crystal for GaN epitaxial growth

Advantages



(Mg:SLN : Mg 1.3mol% doped stoichiometric LiNbO₃)

- ✓ Easy setup for THz Generation
- ✓ Wide THz bandwidth (0.2~2.5 THz)
- ✓ Low Defect Density
- ✓ High damage threshold

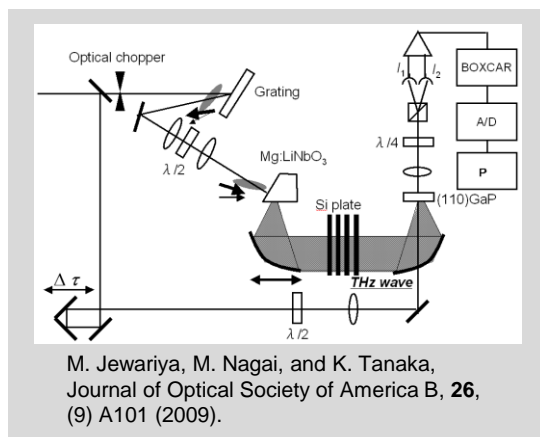



Standard Type1 (Basic)

9 mm x 9 mm x 9 mm





Standard Type2 (High Power)

10 mm x 10 mm x 12.5 mm

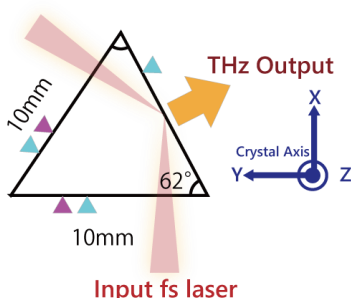

Standard Type3 (Large Aperture)

20 mm x 20 mm x 20 mm

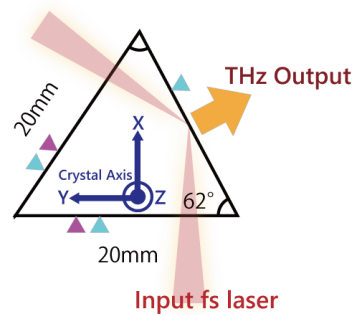

- ▲ Optically polished
- ▲ AR coating
(for Ti:Sapphire laser and 1um fs fiber laser)
@ 780 - 820nm and @1025nm ~ 1065nm

OXIDE

OXIDE Corporation

1747-1 Maginohara, Mukawa, Hokuto, Yamanashi 408-0302 JAPAN
Tel: +81-551-26-0022, Fax: +81-551-26-0033



Sales@opt-oxide.com



<https://www.opt-oxide.com>



Oxide Yamanashi

Detail dimension and specification

Standard Type 1

9mm

9mm

62°

9mm

9mm

▲ Optically polished

▲ AR coating
R<1.0% @ 780 - 820nm
R<0.5% @ 1025nm ~ 1065nm

Crystal Axis

X

Y

Z

Standard Type 2

10mm

62°

62°

10mm

12.5mm

▲ Optically polished

▲ AR coating
R<1.0% @ 780 - 820nm
R<0.5% @ 1025nm ~ 1065nm

Crystal Axis

X

Y

Z

Standard Type 3

20mm

62°

62°

20mm

20mm

▲ Optically polished

▲ AR coating
R<0.5% @ 780 - 820nm
R<1.0% @ 1025nm ~ 1065nm

Crystal Axis

X

Y

Z

OXIDE

OXIDE Corporation

1747-1 Maginohara, Mukawa, Hokuto, Yamanashi 408-0302 JAPAN
Tel: +81-551-26-0022, Fax: +81-551-26-0033



✉ Sales@opt-oxide.com

🖥 <https://www.opt-oxide.com>

✂ Oxide Yamanashi